


Electric Strike Selector (Cross Reference on Back!)




BUILT IN AMERICA
BASED IN AMERICA
BUY AMERICAN


BABA Compliant Electric Strikes

**What lockset
do you have?**


Cylindrical Lock

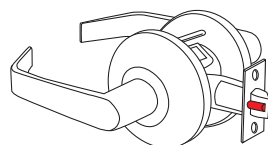


Mortise with
a deadbolt




Mortise Lock




Mortise Lock



Dead Latch




Vertical rod
latch

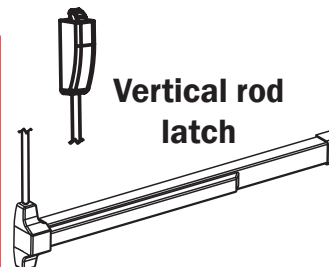


Dor-o-
matic™



Mortise Exit
Device

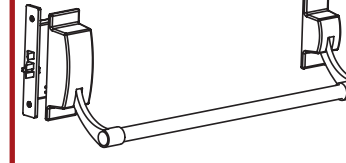

Rim Panic
Exit Device

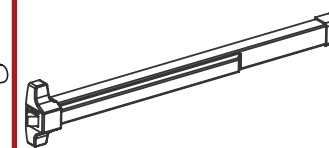

Your choice of
electric strikes are:

A C F I J K L
M N O

B

A F

A C


A C N O

G

H

A F

D E F

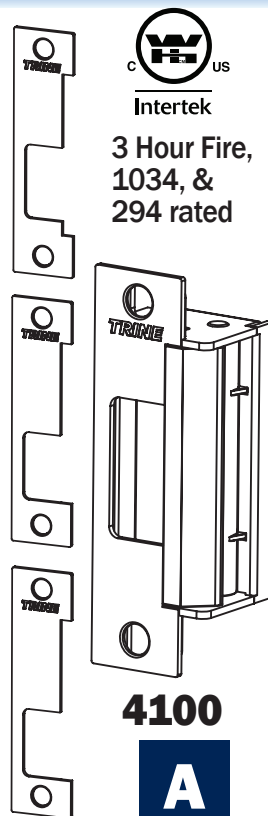


4100

A

SPECIALIZED SOLUTIONS
ELECTRIC STRIKE SERIES

Fire Rated

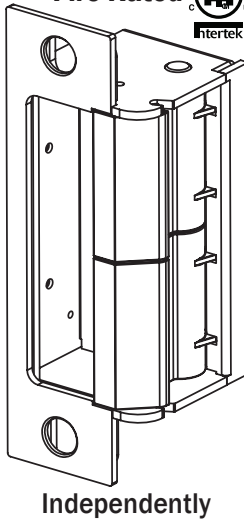


Independently
operated latches

4100DBDL

B


294 Listed
1034 Listed

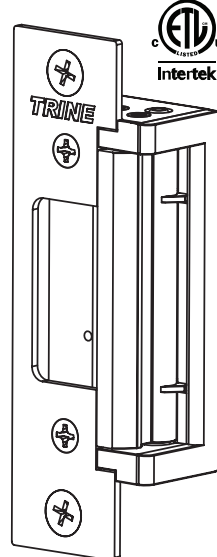

4300CC

C

Surface Mount
294 Listed
1034 Listed

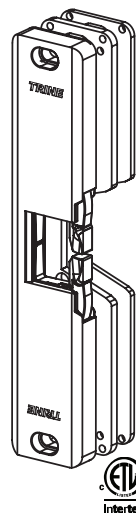

**Enhanced
4850**

D

294 Listed
1034 Listed




4800F

E

**THE OUTDOOR
SOLUTION
FOR GATES**

294 Listed
1034 Listed
10C-3HR Listed

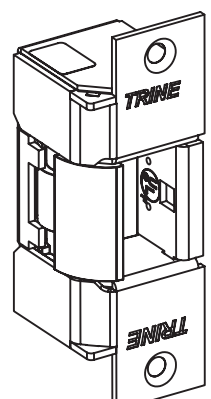


400CMRP KIT

F

Smallest Electric Strike in the World

SPECIALIZED SOLUTIONS
ELECTRIC STRIKE SERIES


**THE VERTICAL
ROD LATCH
SOLUTION**

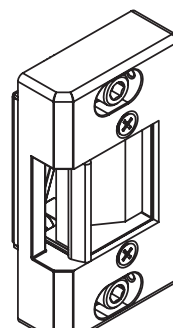

3275VRP-LC

G


**The Dor-
O-Matic™
Solution!!!**

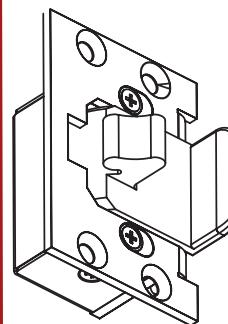

**3250SOM-LC
STRIKE-O-MATIC™**

H



**FIRE RATED
MODELS**

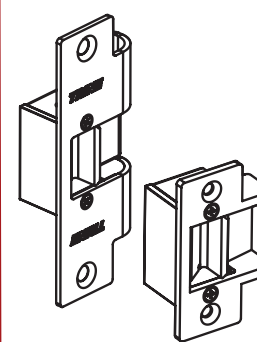

**323478F-LC
323478FX-LC**

I

Compatible Strike Plates

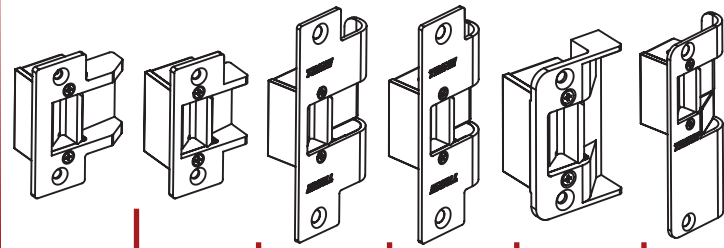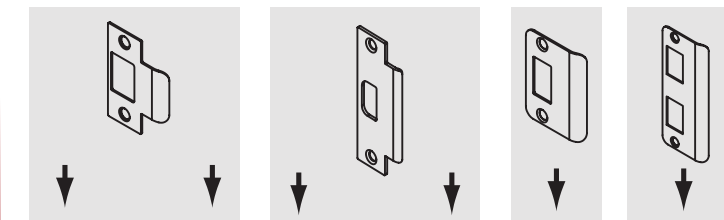

**234X
-375**

J

234

K

**478X
-375**

L

478

M

**258,
258RD**

N

458

O

Not recommended
for use on uncovered
exterior doors.

Compatible Door Frames

- Aluminum
- Hollow Metal
- Wood

Use the **4100RX**
for Raco®
frames (covers
the extra 1/4"
gap in the frame)

- Aluminum
- Hollow Metal
- Wood

The only strike
allowing for
deadbolt privacy
with an override.

- Aluminum
- Hollow Metal
- Wood

**1/4" horizontal
adjustment**

C

(CONTINUED)

- Aluminum
- Hollow Metal
- Wood

For use with
the Yale
Squarebolt®
or Corbin
Russwin
Securebolt™

NOTE
Use the
4801

Great for Gates

The CMRP works
with Cylindrical,
Mortise, and Rim
Panic devices

Compatible Door Frames

- Aluminum
- Hollow Metal
- Wood

2-3/4" WIDE
PLATE. FITS IN
TIGHT SPOTS IN
THE HEADER

- Aluminum
- Hollow Metal
- Wood

- Aluminum
- Formed Sheet Metal
- Wood

- Formed Sheet Metal
- Wood

- Hollow Metal
- Wood

- Aluminum
- Formed Sheet Metal
- Wood

- Hollow Metal
- Wood

- Aluminum

- Aluminum

4100DB & 4100CDBM
(4 FACEPLATES)

All inclusive
All faceplates

**NIGHT LATCH ONLY
FUNCTIONALITY - FOR MORTISE
LOCKS WITH DEADBOLTS**

4300


Four faceplates
included, two 4-7/8"
faceplates, one 6-7/8",
and one 7-15/16".

4300CC

Two 4-7/8" faceplates
(square and rounded
corners), best pricing
option in the 4300 series.

4300CC-DKBZ-32D

4-7/8" faceplates only,
two color options included,
best color option of the
4300 series.

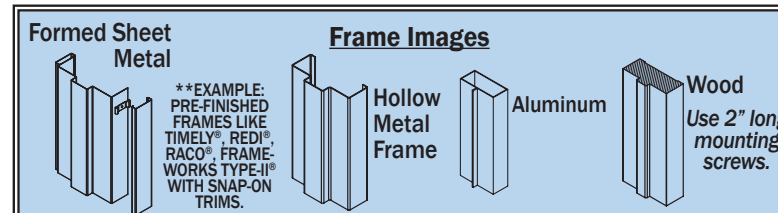


trineonline.com

203-730-1756

Dial "1" for Customer Service
Dial "2" for Technical Support

Converting to

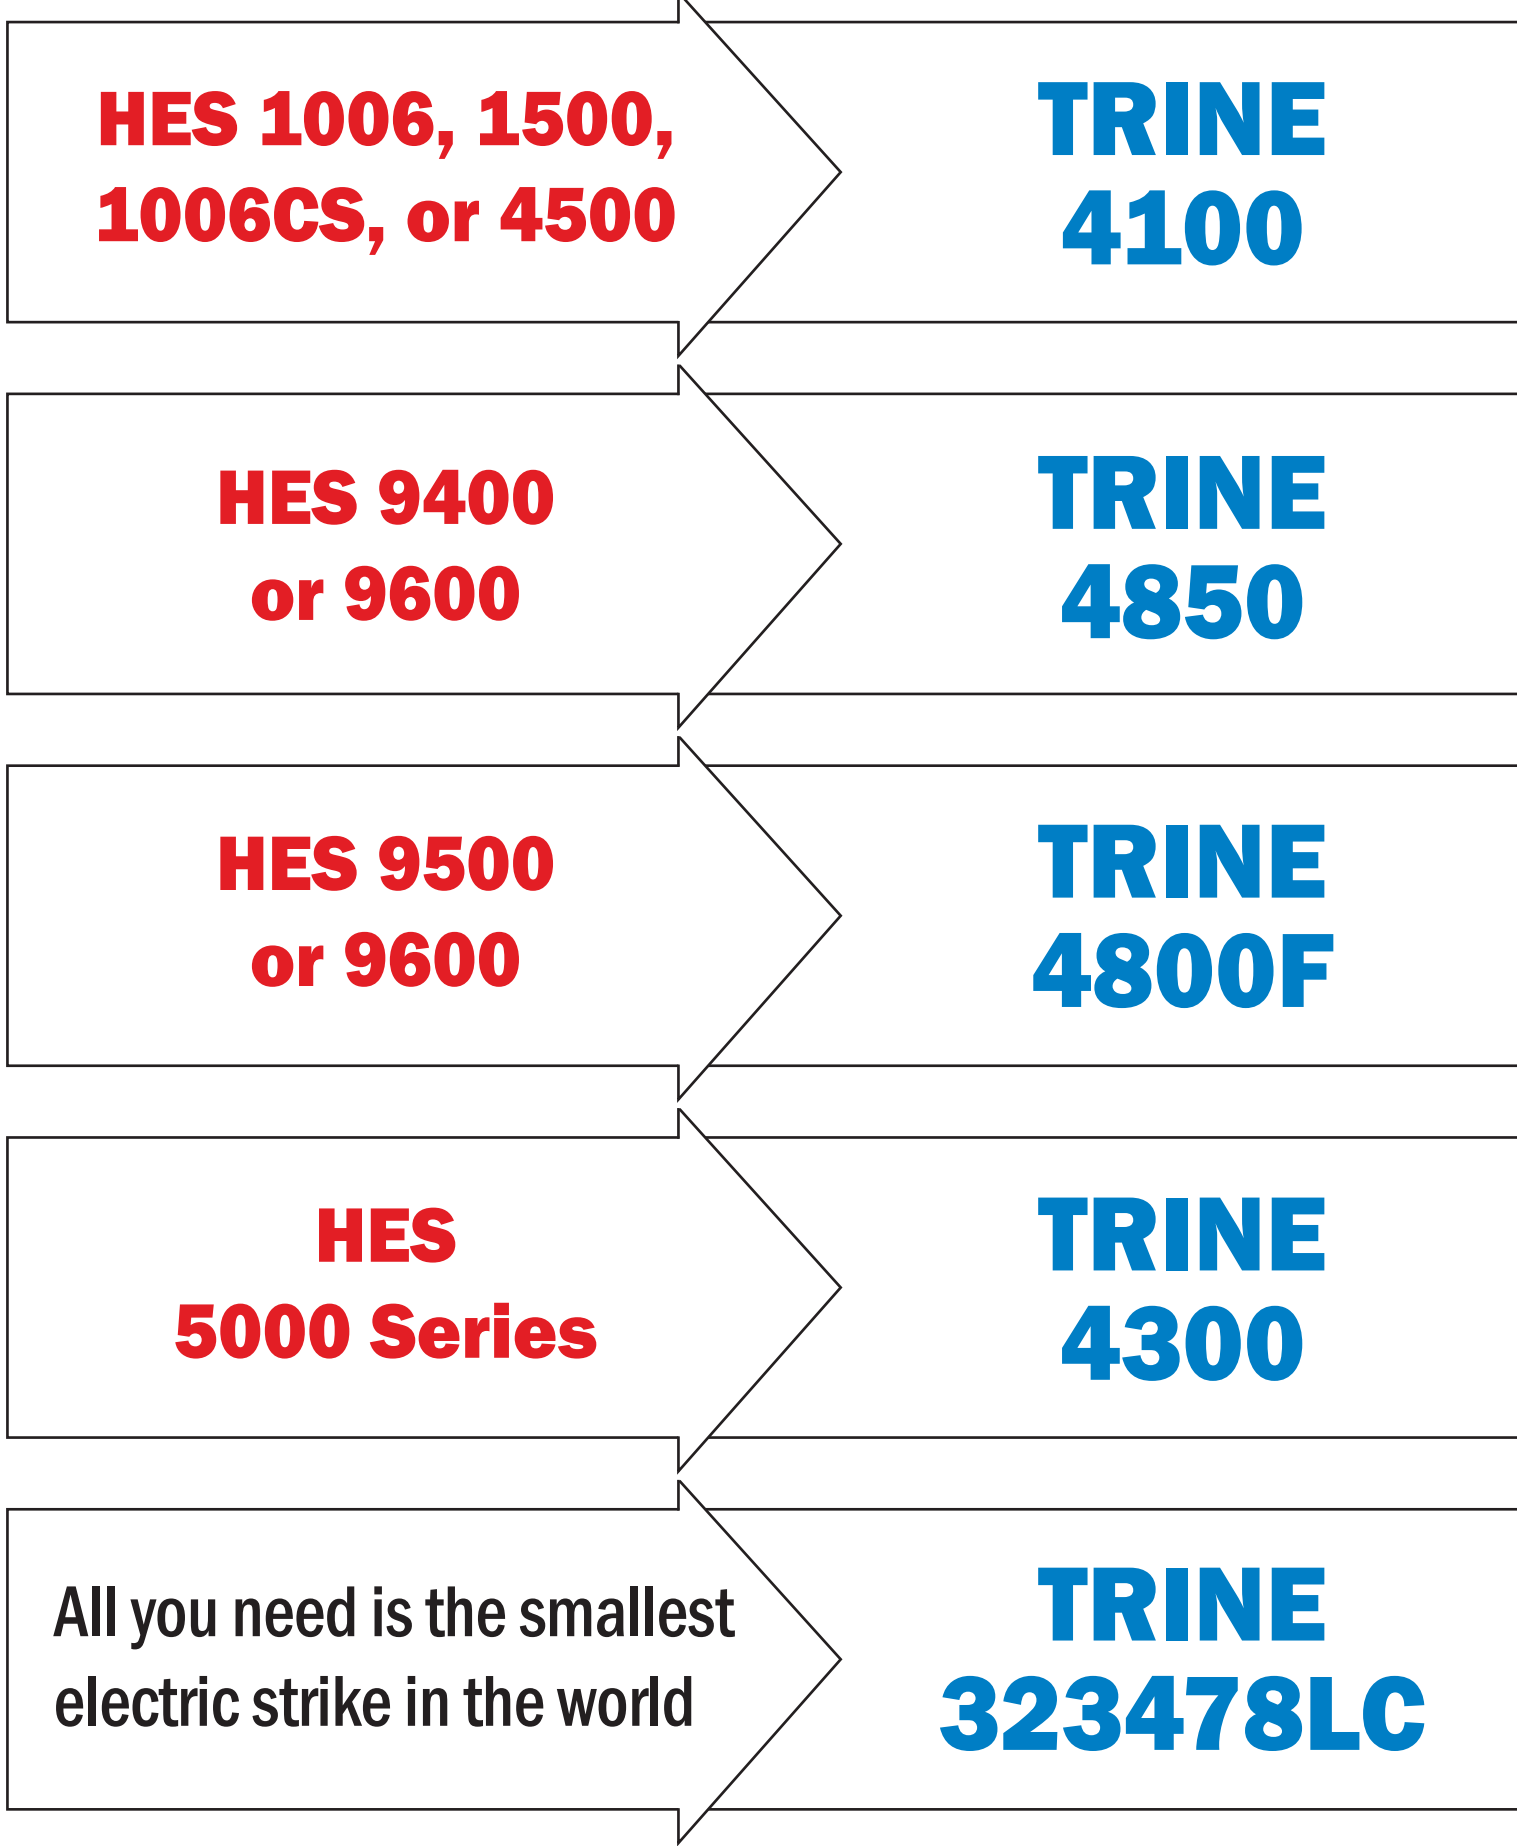

Cross Reference Chart **BUILT IN AMERICA
BASED IN AMERICA
BUY AMERICAN**
BABA Compliant Electric Strikes

TRINE	Adams Rite	Folger Adam	H.E.S.	RCI	Von Duprin
4100	----	----	4500, 1500 1006CLB ^Φ	----	6400 ^Φ 6211/6211WF ^Φ
4100DB	----	----	1600/CDB, 1006/CDB *	2164 or F2164	6400
4100CDBM	----	712/712-75/732 732-75/642CYL ^Ω	1600CS	----	----
4100DBDL	----	----	----	----	----
4300	7400	----	5000C & 5200	S & L65U	4200
4300CC	7400		5000C 5200	S & L6514	5100
4800F	----	----	9500, 9600	0162/0162F	6300
4801	----	----	9700	----	----
4850	----	----	9400 ^Δ , 9600	0163	----
EN400	7200	712/712-75/732 732-75/642CYL	1006J/7501	2114/F4114*	6211/6211WF
EN800**	74R1	310-4	7000-783S**	0161	6112
EN850**	74R2	310-4	7000-789S**	----	----
EN950	----	310-2	7505	----	6215/6226
EN960	----	310-2 3/4	----	----	6214/6224
3478F	7200	----	5300	F4114	----
323478LC	----	----	----	----	----
323478F-LC	----	----	----	----	----
234 [∂]	----	----	----	----	----
258‡ [∂]	----	----	----	----	----
458Ω [∂]	----	----	----	----	----
478‡ [∂]	7400+	----	5000/5200+501	L6514+	----
3250SOM-LC	----	----	----	----	----
3275VRP-LC	----	----	----	----	----

+ Strike has 1-1/16" backset vs. 1" backset for 3000 Series.
Ω Requires 80% less cutting of frame. Fills the frame preparation of the Adams Rite MS Locks without the need To relocate tabs for 6 5/8" or 6 7/8" electric strikes.
‡ Requires 60% less frame face cutting other than models listed.
Δ 9400 backplate means it can only handle up to a 1/2" throw – The 4850 can take up to a 1" throw.
* UL 90 Minute Fire Rated
** All Stainless Steel construction, not fire rated.
Φ Not a shallow (1 3/8") backset – cannot be used in 2" fire rated frames with 1/2" sheetrock ingress
∂ Number is for the Faceplate – use with a 3012, 3024, 30LC, or 30RS Mechanism, see pg 11 for more details.

NOTE: There may be variations in physical size or electrical characteristics between manufacturers. Information in the above chart based on manufacturers' catalogs and reference should be made to manufacturer's catalog for complete detail comparisons.