

THE SMALLEST FIRE RATED ELECTRIC STRIKE IN THE WORLD

3478F

- Heavy duty stainless steel construction
- 1" total backset
- 1/8" horizontal adjustment
- Two 1/16" shims for depth adjustment
- Trim skirt (CCFP) included (see pg 15*)
- 3478F-LC includes LC200


Key Features

- Accepts up to 5/8" latch throw
- 500,000 + life cycles
- 1,500 + lbs. holding force (1,200 lbs. for 334)
- Dynamic Force 70 ft/lb.
- Tested to Grade 1: BHMA - A156.31
- Fail-safe Option - "RS" (locks with power)

Standards:

- 3-hour fire rated – UL10C, Fire Tests of Door Assemblies.
- Tested to Grade 1 - Heavy Duty

** NOTE: WH fire listing is void when using fail safe action.*

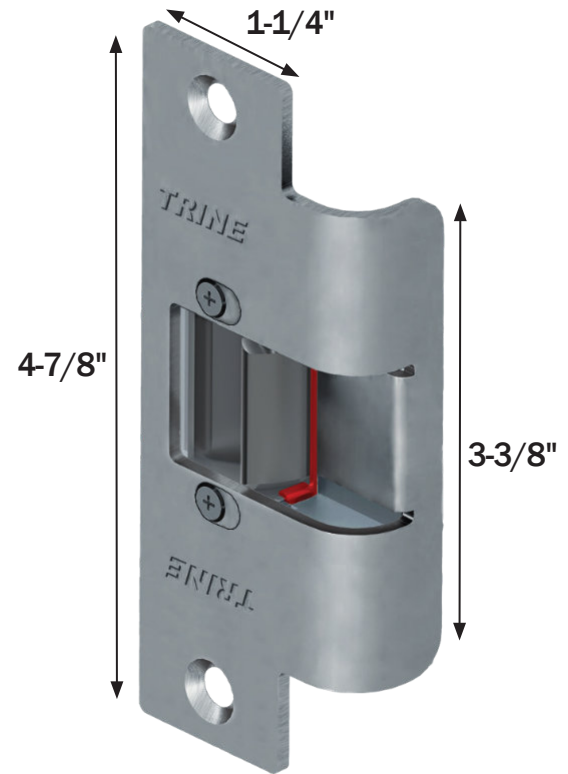

Finishes:

3478F-LC-32D

(Satin Stainless Steel — BHMA630)

* 3478F-RS-32D

(Satin Stainless Steel — BHMA630)

3478F-LC-DKBZ

(Dark Bronze Powder Coat — BHMA613E)

* 3478F-RS-DKBZ

(Dark Bronze Powder Coat — BHMA613E)

3478F-12DC-32D

(Satin Stainless Steel — BHMA630)

3478F-24DC-32D

(Satin Stainless Steel — BHMA630)

3478F-12DC-DKBZ

(Dark Bronze Powder Coat — BHMA613E)

3478F-24DC-DKBZ

(Dark Bronze Powder Coat — BHMA613E)

** NEW LC VOLTAGE CHARACTERISTICS - USE LC-200 FOR DC ONLY **

MODELS	VOLTAGE	PULL IN/HOLD AMPS	OHMS	DUTY	SOUND
323478LC/ 3258458LC/ 323478F-LC/ 323478FX-LC 30LC/30RS	12VDC	.420/.280	N/A	Intermittent/Continuous	Silent
	24VDC	.840/.150	N/A	Intermittent/Continuous	Silent
** Must use LC200 on DC for all LC/RS units.					
	12VAC	0.840	11	Intermittent	Buzz
	16VAC	1.200	11	Intermittent	Buzz
	24VAC	1.70	11	Intermittent	Buzz

**** Do not use LC-200 for AC Power - for AC wire direct to 30LC mechanism****