
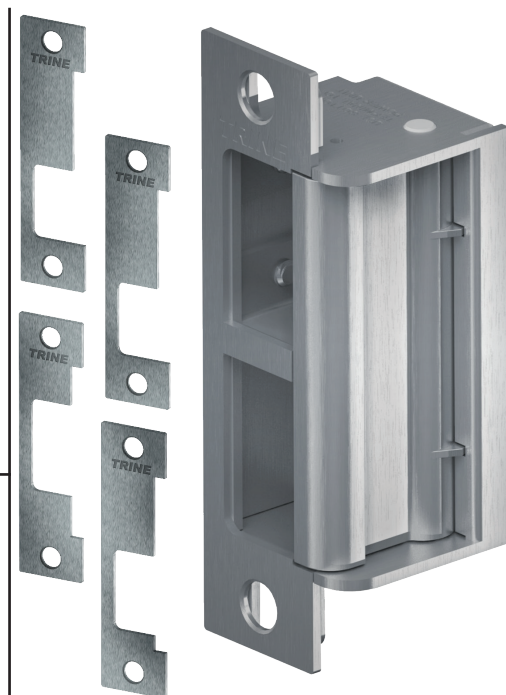


4100CDBM

FOR MORTISE LOCKS WITH DEADBOLTS

Use with cylindrical locksets, mortise locks without dead bolts and mortise exit devices.

- 1 - 5/8" shallow backset for use with mortise locks with deadbolts
- 8 faceplates included
- Included removable deadbolt bracket
- Flexible: Always be prepared!
- 12 & 24DC, 12-24 AC
- 1 Trim Skirts Provided (32D Finish)
- Strong: Exceeds 3,250 lbs. of Holding Force
- Durable: Exceeds 1,000,000 Life Cycles
- Works with the Schlage® L Series & Yale® 8700 Series without relocating mounting tabs.



Standards:

- WH recognized 3-hour fire rated – UL10C, Fire Tests of Door Assemblies.
- BHMA Grade 1: ANSI/BHMA A156.5
- UBC 7-2, Uniform building Code.
- CAN4 S104, Standard Method for Fire Tests of Door Assemblies.
- NFPA 252 - Issue: 1999/01/01 Standard Methods of Fire Tests of Door Assemblies.

NOTE: WH fire listing is void when using fail safe action.


The 4100DB/4100CDBM is
ETL recognized for:
UL1034 Burglary Listed

4100CDBM/DB ELECTRICAL CHARACTERISTICS:

Voltage	Current Draw	Power Consumption	Resistance
12DC	.240 Amps	2.90 Watts	50 Ohms
24DC	.114 Amps	2.74 Watts	210 Ohms
12AC @ 50-60Hz	.210 Amps	2.50 Watts	50 Ohms
16AC @ 50-60Hz	.281 Amps	4.48 Watts	50 Ohms
24AC @ 50-60Hz	.420 Amps	10.08 Watts	50 Ohms




The 4100DB/4100CDBM
is WH recognized for
UL294

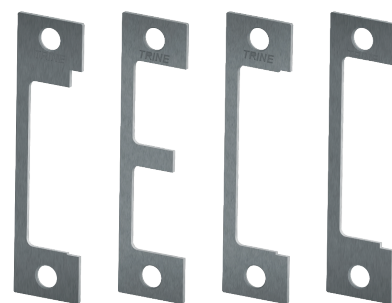

4100CDBM/4100DB FRAME PREPARATION

METAL FRAME INSTALL

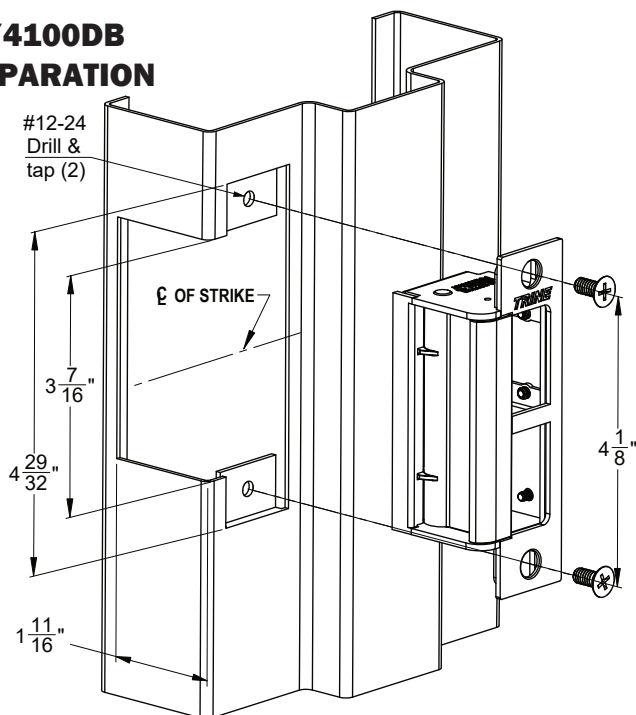

WOOD FRAME INSTALL

